

LROC-100 Room Controller

Installation instructions

Instructions de montage


Montageanweisung


Montagevoorschrift

Istruzioni di montaggio

Instrucciones de montaje

Monteringsanvisning

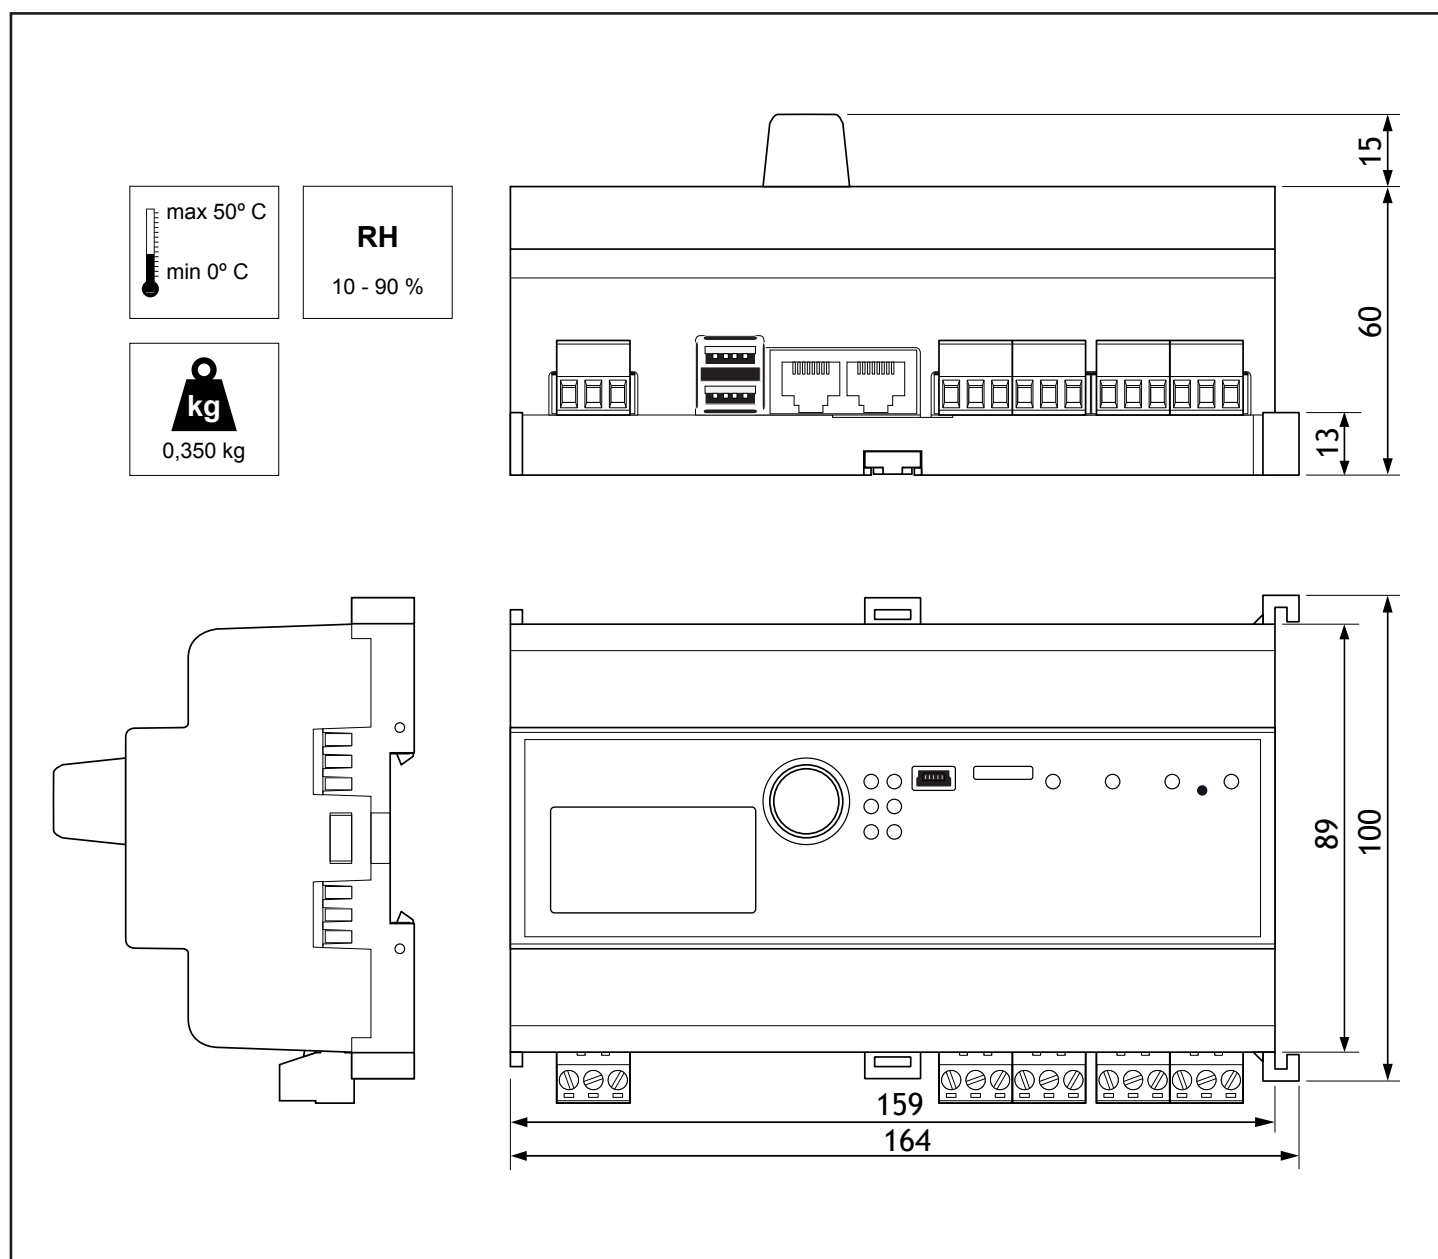


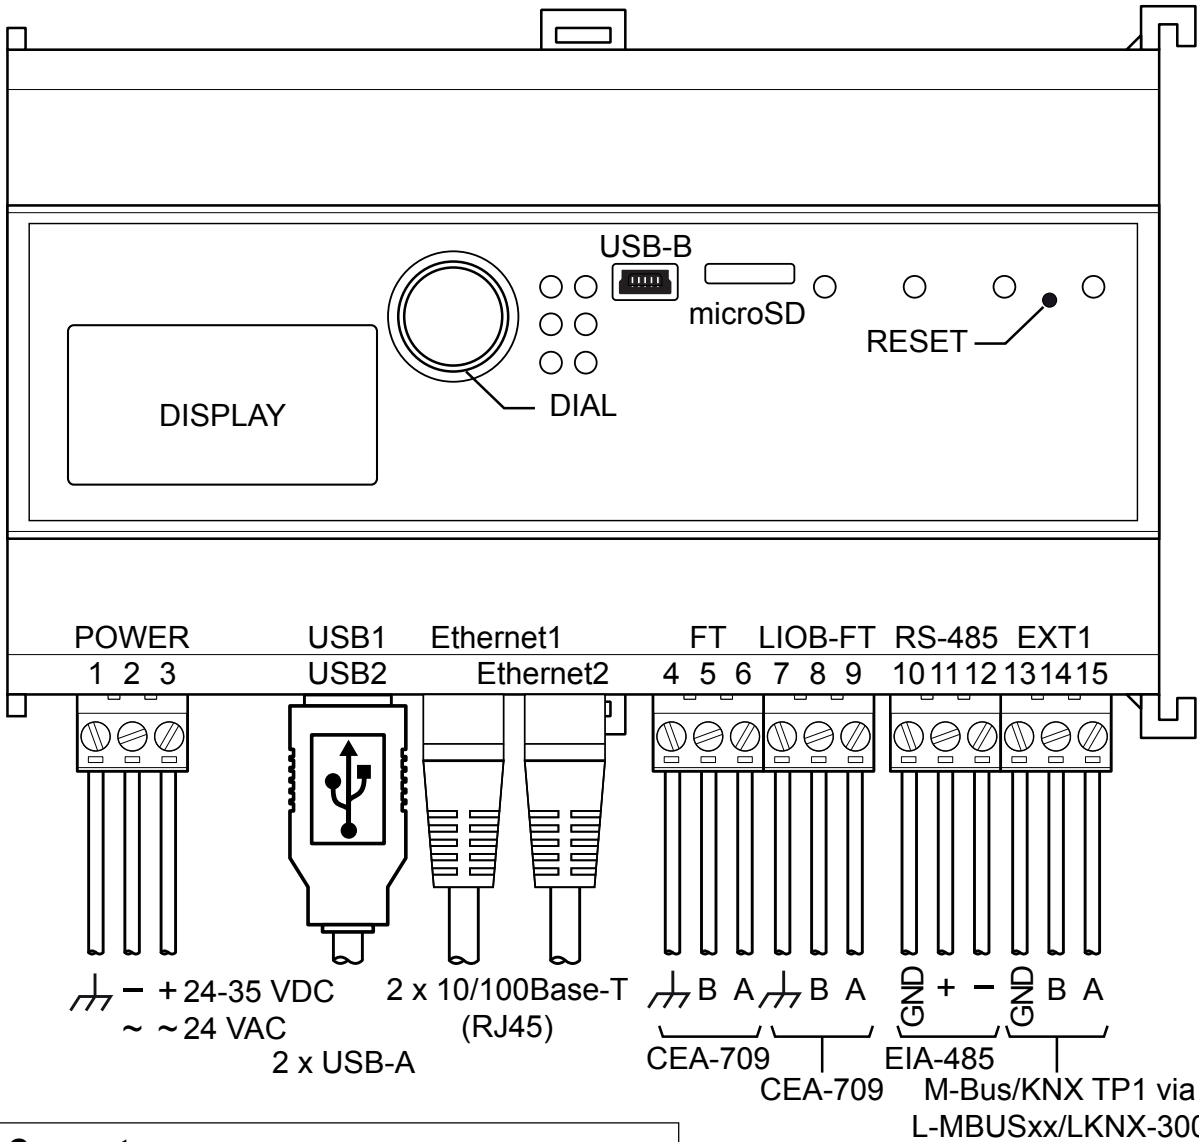


Connectors		
POWER	1	Power supply input EARTH GND
	2	Power supply input MINUS Can be connected to EARTH GND
	3	Power supply input PLUS Must NOT be connect to EARTH GND
FT CEA-709	4	Input EARTH GND
	5	Input B
	6	Input A
LIOB-FT CEA-709	7	Input EARTH GND
	8	Input B
	9	Input A
RS-485 EIA-485	10	Input GND
	11	Input +
	12	Input -
EXT1 M-Bus KNX TP1	13	Input GND
	14	Input B
	15	Input A

Connectors		
USB1	USB-A	USB Host
USB2	USB-A	USB Host
USB-B	USB-B	PC
Ethernet1	RJ45	10/100Base-T
Ethernet2	RJ45	10/100Base-T
microSD	slot	microSD card max. 2 GB


Buttons	
RESET	Reset
DIAL	Turn-and-Push Dial

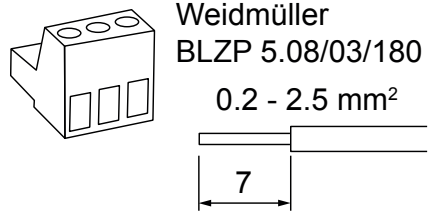

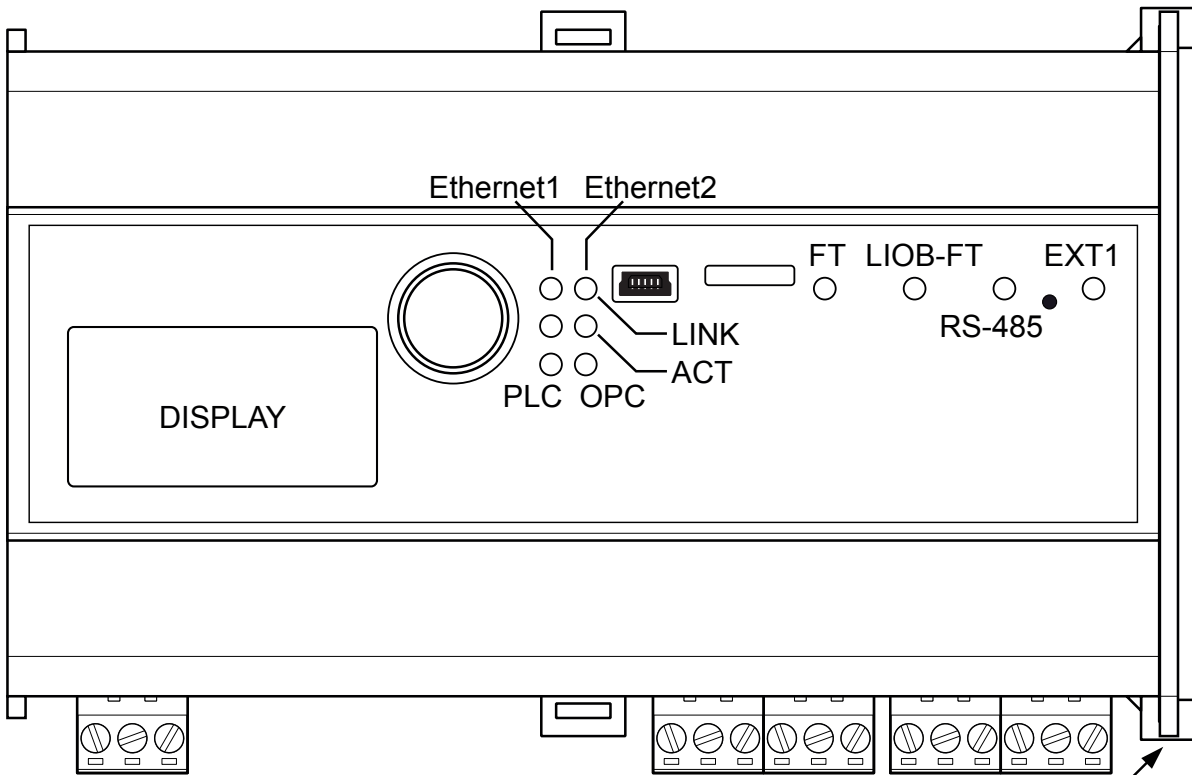

Status LEDs		
LINK	GREEN	Ethernet link
ACT	GREEN flashing	Ethernet traffic
PLC	GREEN	PLC normal operation
	RED flashing 2 Hz	PLC overload
OPC	GREEN	OPC client connected
	GREEN flashing	OPC activity
FT	GREEN flashing fast	Traffic on CEA-709 port
	GREEN flashing 1 Hz	Not commissioned
	RED permanent	CEA-709 port damaged
	RED flashing fast	CEA-709 traffic overload
LIOB-FT	GREEN flashing	Traffic on LIOB-FT port
	RED permanent	LIOB-FT port damaged
	RED flashing fast	LIOB-FT traffic overload
RS-485	GREEN	Modbus Master link
	GREEN flashing	Modbus traffic
	ORANGE	Modbus Slave Mode
	ORANGE flashing	Modbus traffic Slave
	RED permanent	Modbus port damaged
	RED flashing fast	Modbus traffic overload
	GREEN flashing fast	Traffic on BACnet port
	GREEN flashing 1 Hz	Not commissioned
EXT1	RED permanent	BACnet port damaged
	RED flashing fast	BACnet traffic overload
	GREEN	M-Bus/KNX link
EXT1	GREEN flashing	M-Bus/KNX activity
	RED permanent	M-Bus/KNX port damaged
	RED flashing fast	M-Bus/KNX traffic overload


Install the cover

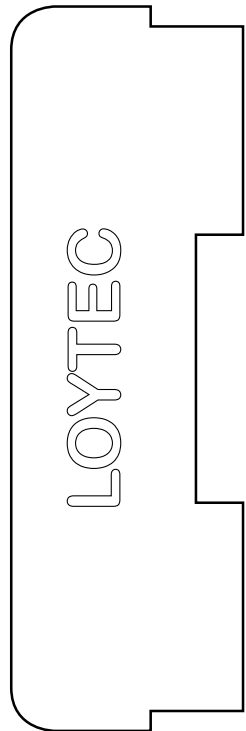

http://192.168.1.254
 User: admin
 Password: loytec4u

Please update the firmware of the device first,
 see www.loytec.com/support/download

35 mm x 7.5 mm DIN rail (EN 50022, BS 5584, DIN 46277-3)

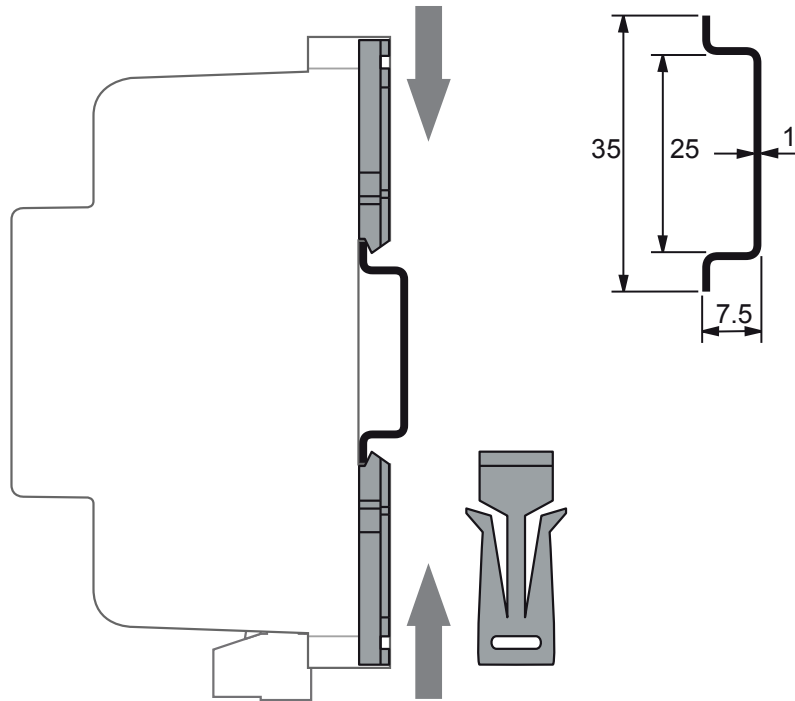

Node ID of CEA-709 Port 1 FT

Node ID of CEA-709 Port 2 LIOB-FT

Node ID of LIOB-Connect

Virtual (Node) ID of CEA-852 port (Ethernet)

MAC address of CEA-852 Ethernet port

Serial number of the device

