

Overview

The 3-AADC1 Addressable Analog Circuit Module is a local rail module used on the EST3 system. The module requires one connection on the rail chassis. The module can support 99 addressable analog sensors and 99 addressable analog modules. The controller also features a hinged front panel for a Control Display Module, which are available in a variety of LED and/or switch configurations. The 3-AADC1 is a direct replacement for the 3-AADC and 100% backward compatible.

The microprocessor based 3-AADC1 provides internal test and diagnostic functions for troubleshooting. The controller contains nonvolatile memory that stores the operating system software and data file which is downloaded from a PC. The System Definition Utility Program accomplishes data file programming including the device type, address, description, sensitivity, verification, and wiring configuration. The 3-AADC1 continuously checks the output value of each device, reporting status to the cabinet CPU. The module can isolate ground faults to a specific addressable loop.

All field wiring connections to the module are made via plug-in connectors, permitting termination of field wiring without the module installed in the enclosure. The plug-in connectors and snap rivet module mounting facilitate rapid remove and replace troubleshooting without the use of tools.

Standard Features

- Class A (Style 7) or Class B (Style 4)
- Continuous monitoring of analog device values
- Ground fault detection by loop
- Removable field wiring terminals
- Fully backward compatible with the 3-AADC
- Listed for fire and security

Addressable Analog Device Controller

3-AADC1



EN54-2:1997+A1 and
EN54-4:1997+A1:2002+A2
pending

Application

The 3-AADC1 is ideal for EST3 systems being installed in retrofit applications where there is a quantity of existing analog devices installed. The 3-AADC1 is compatible with:

Sensors

- 1551F ionization
- 2551F photoelectric
- 2551TF(B) photoelectric/thermal
- 5251F(B) thermal
- DH200PF photoelectric duct detector
- 1251F(B) ionization
- 2251F(B) photoelectric
- 5551F thermal
- 5551FR fixed/ROR thermal

Modules

- M400MF(B) monitor
- M500CFS control
- M500XF isolator
- M501MF monitor
- M500SF control
- M500RF relay

NOTES: Relay bases, isolator bases, sounder bases, RZB12-6 and UIO-12 modules are NOT supported. The 3-AADC1 is fully backward compatible with the 3-AADC.


The Addressable Analog circuit cable must be a minimum of 18 gauge twisted pair with 6 twists per foot. This cable may be unshielded or shielded as required. Shielded cable is recommended where electrical noise might interfere with data transmission. If shielded wire is used, it must be used through the entire length of the circuit. Distance limits are determined using the maximum allowable circuit resistance and capacitance, and manufacturer's cable specifications.

Engineering Specification



The control panel shall provide an addressable analog interface module to directly connect to the existing addressable analog sensors and modules. The interface shall be capable of supporting 99 analog sensors and 99 input/control modules, and identifying ground faults by loop. The module shall be capable of accommodating both Class A (Style 7) and Class B (Style 4) wiring. All field wiring terminations shall be made to removable connectors for ease of installation and troubleshooting.

Typical Wiring

CLASS A WIRING

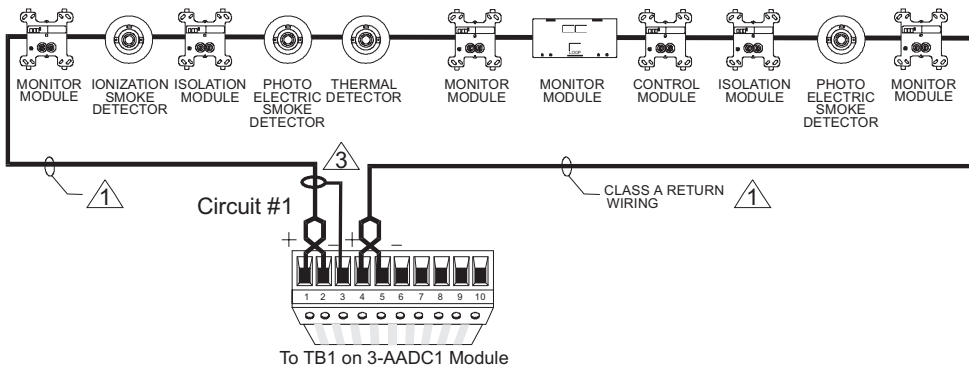

CLASS B WIRING WITH T-TAP

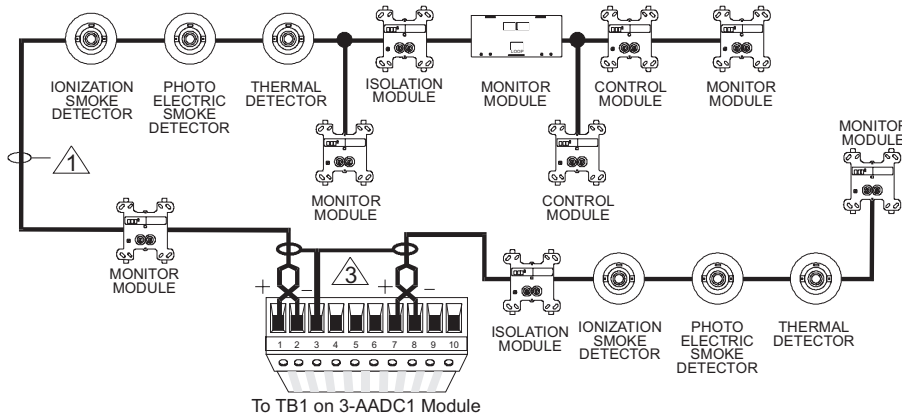

Wiring Notes	
1	Maximum #12 AWG (2.5 mm ²) wire; minimum #18 AWG (0.75 mm ²) wire
2	Maximum wiring resistance 50 ohms, maximum wiring capacitance 0.5 µF
3	Shields (if used) must be continuous, insulated, and connected to Earth Ground only at the 3-AADC1 Module.
4	The analog addressable circuit does NOT support RZB 12-6's or UIO-12's
5	All wiring supervised and power limited

Specifications

Installation	1 LRM Space	
Module Configuration	1 Addressable Analog Circuit	
Operating Current	Standby	175 mA
	Alarm	205 mA
Addressable Circuit Capacitance	0.5 μ F, max., all branches	
Addressable Circuit Resistance	50 Ohms, max (NO RZB12-6 or UIO-12 modules or relay bases permitted)	
Addressable Circuit Configuration	Class A (Style 7) or Class B (Style 4)	
Addressable Circuit Capacity	Sensors	99 sensors per circuit
	Modules	99 modules per circuit
Ground Fault Limits	10K Ohms, min.	
Isolator Limits	# Isolator modules per circuit	6 Maximum
	# Devices between two isolators	25 Maximum
	# Devices between panel and first isolator	25 Maximum
	# Devices between last isolator and panel (Class A)	25 Maximum
	Max. resistance from device to panel	25 Ohms
Maximum Wire Size	12 AWG (2.5 mm ²)	
Termination	Removable plug-in terminal strip on LRM	
Operating Environment	32°F (0°C) to 120°F (49°C) 93% RH, non-condensing	
Agency Listing	UL, ULC, CE, LPCB EN54* pending.	

* EN54-2:1997+A1 and EN54-4:1997+A1:2002+A2 pending

Ordering Information

Catalog Number	Description	Shipping Wt., lb (kg)
3-AADC1	Addressable Analog Module	0.5 (.23)

GE Security

U.S.
T 888-378-2329
F 866-503-3996

Canada
T 519 376 2430
F 519 376 7258

Asia
T 852 2907 8108
F 852 2142 5063

Australia
T 61 3 9259 4700
F 61 3 9259 4799

Europe
T 32 2 725 11 20
F 32 2 721 86 13

Latin America
T 305 593 4301
F 305 593 4300

www.gesecurity.com

© 2006 General Electric Company
All Rights Reserved



imagination at work