



# TG-KH/NTC20

## Duct sensor with housing

Temperature sensor with NTC20 element for air temperature measurement in ventilation and air handling installations.

- Anti-tear M16 cable gland
- Screw cap
- 10 mm hole for probe

- Adjustable insertion length (60...205 mm) and good sealing
- Modern design and compact format

Tempero series temperature sensor with a modern design suiting all environments. The sensor is very easy to mount, has an adjustable insertion length and a flexible mounting bracket that closes tightly against ducts.

The sensor is compatible with Honeywell.

### Technical data

Temperature range	-30...+70°C
Compatible with	Honeywell
Sensor element	NTC 20k6A1, 20 kΩ/25°C
Time constant	16 s
Cable gland	M16
Insertion length	60...205 mm, adjustable
Diameter, probe	5 mm
Diameter, well	8 mm
Pressure rating	PN25
Protection class	IP65

### Material

Housing	Polycarbonate
Probe	Stainless steel, standard: SIS 2343 acid-resistant



### Colour

Cover	Polar white RAL9010
Base	Dark grey RAL7043

Temperature (°C)	Resistance (Ω)
15	32346
10	41567
5	53812
0	70203
-5	92322
-10	122431
-15	163777
-20	221088
-25	301297
-30	414698

Temperature (°C)	Resistance (Ω)
70	3099
65	3732
60	4517
55	5494
50	6718
45	8259
40	10211
35	12698
30	15887
25	20000
20	25350

### Dimensions (mm)

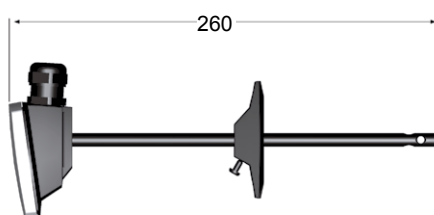

### Head office Sweden

Phone: +46 31 720 02 00  
 Web: [www.regincontrols.com](http://www.regincontrols.com)  
 Mail: [info@regin.se](mailto:info@regin.se)

**REGIN**

THE CHALLENGER IN BUILDING AUTOMATION