




Relay control units IRRM1, IRRM2 & IRRM3

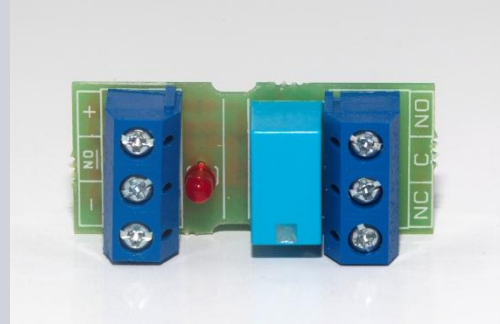

- Converts open collector outputs to volt free contacts
- Wide operating voltage range
- Low current consumption
- Discrete and compact

■ Technical Specifications

	IRRM1	IRRM2	IRMM3
Supply voltage		9...30 V DC	
Current consumption	12...21 mA	12...21 mA	12...21 mA
Relay type	SPDT	SPDT	DPDT
Contact rating		30W, 30V AC/DC 1A	
Dimensions (L x W x H) mm	37 x 16 x 14	37 x 16 x 14	38 x 27 x 14
Indication		Red LED	
Input (+ve, -ve & control -ve)	3 x 15cm wires	3 x screw terminals	3 x screw terminals
Output	3 x screw terminals	3 x screw terminals	6 x screw terminals
Operating temperature	-10...+70°C	-10...+70°C	-10...+70°C
Mounting	Self-adhesive pad	-	Self-adhesive pad

■ Ordering Information

Type	Art.-No.	Description	Weight
IRRM1	S54592-Z142-A100	Relay control unit	0.020 kg
IRRM2	S54592-Z143-A100	Relay control unit	0.025 kg
IRMM3	S54592-Z144-A100	Relay control unit	0.030 kg

The information in this document includes general descriptions of the technical possibilities, which need not be installed in each individual case. The desired performance characteristics must therefore be specified for the individual case when the contract is concluded.

© Siemens Building Technologies • Edition: 24.09.2014