

Temperature sensor AKS 12

Introduction and application



The sensor is based on a PT element with a resistance of 1000 ohm at 0°C.

The sensor can be used for temperature monitoring in conjunction with EKC 200 and EKC 300 series in the following areas:


- Refrigeration
- Air conditioning
- Heating

The sensor comes adjusted and complies with the requirements to tolerance in EN 60751, class B.

Technical data

Nominal resistance	1000 ohm at 0°C
Measuring accuracy	Class B
Temperature range	-40 to 100°C
Cable material	PVC 2 x 0.22 mm ²
Sensor tube	18/8 stainless steel
Time constant	15 seconds
Enclosure	IP 67
AMP Plug	AMP ital mod 2, housing 280 358 crimp contact 280 708-2

R (Typ.) Ohm	Temp. °C	Temp. °F
1117	30	86
1078	20	68
1039	10	50
1000	0	32
961	-10	14
922	-20	-4
882	-30	-22

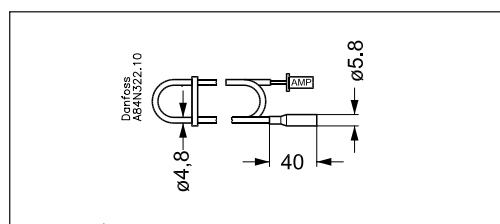

Ordering

Type	Cable	Packing Qty.	Code no.
AKS 12	1.5 m	1	084N0036
		30	084N0035
	3.5 m	30	084N0039
	5.5 m	30	084N0038
	5.5 m with AMP-plug	30	084N0037

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alternations can be made without subsequential changes being necessary in specifications already agreed.
All trademarks in this material are property of the respective companies. Danfoss and Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.

