


4-CHANNEL mA/V-CONVERTER MAV 4

MAV 4 is a 4-channel converter transforming 4...20mA input signals to 2...10V output signals.

Supply voltage needed for 2-wire transmitter is available by linking the TX-connector for each input channel. If the transmitter connected to the input is using external supply voltage the EX-connector must be linked.

LED-lamp indicates that 24Vdc is available.

Wiring and codings:

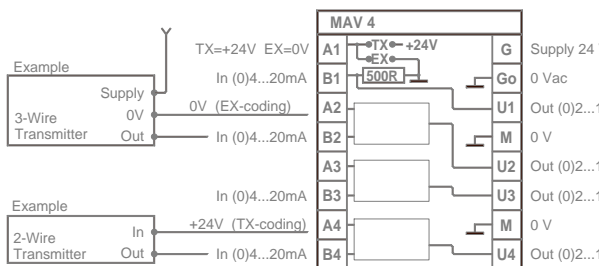

Technical data

Supply	24Vac
Internal aux. voltage	24Vdc, 80mA
Terminals	2.5 mm ²
Dimensions (w x h x d)	45 x 77 x 42 mm

Wiring:

G	supply	24Vac
G0		0 Vac
A1	input 1	4...20mA
B1		
A4	input 4	4...20mA
B4		
U1	output 1	2...10Vdc
U4	output 4	2...10Vdc
M	output	0 Vdc

Ordering guide:

Model	Product number	Description
MAV 4	1182100	mA/V converter

Products fulfill the requirements of directive 2004/108/EY and are in accordance with the standards EN61000-6-3: 2001 (Emission) and EN61000-6-2: 2001 (Immunity).

Produal Oy

Keltakalliontie 18
48770 Kotka
FINLAND
www.produal.fi

Tel: +358-5-230 9200
Fax: +358-5-230 9210
info@produal.fi